


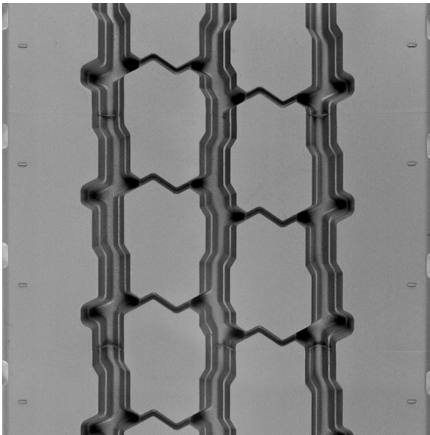

APWs

The Oliver® APWS is an all position retread designed for use in waste and mixed service applications.

POSITION

All-Position

APPLICATION

Urban / On/Off Road

BENEFITS AND FEATURES

- Solid shoulder for improved durability in high scrub applications.
- Superior chip and cut protection in mixed service.
- Recommended for 30% or less off-road service.
- Utilizes Oliver’s exclusive tread feature called VDi plus®. This tread feature acts as a Visual Depth indicator plus, which resists stone retention and other road debris. It also helps enforce any pull point schedule.
- Self cleaning design with three circumferential grooves channel away water.

SPECIFICATIONS

Radial Only

SIZE		BASE WIDTH		TREAD DEPTH	
mm	std.	mm	in.	mm	in.
220	9	220	8.66	21 mm	26/32
230	9.5	230	9.06	21 mm	26/32
240	10.5	240	9.45	21 mm	26/32
250	12	250	9.84	21 mm	26/32
270	14	270	10.63	21 mm	26/32
280	14.5	280	11.02	19 mm	24/32

For sizes 240, 250 and 270 mm are designed for use at ISO speed rating of J (62 mph) or below.

For size 280 mm - Designed for dual tire use only.

Net Footprint: 78%

FITMENTS

Axle position indicated by "▲"

 CEMENT TRUCK	 DUMP TRUCK	 LOGGING TRUCK	 ROLL ON/ROLL OFF DUMPER	 TRANSFER TRUCK	 WASTE TRUCK
---	---	--	---	---	--

To learn more please contact your OLIVER® Sales Representative or visit oliverrubber.com
Oliver Rubber Company, One Parkway South, Greenville, SC 29602-9001, 1-866-464-2580
Copyright© 2024 Oliver Rubber Company. All Rights reserved.