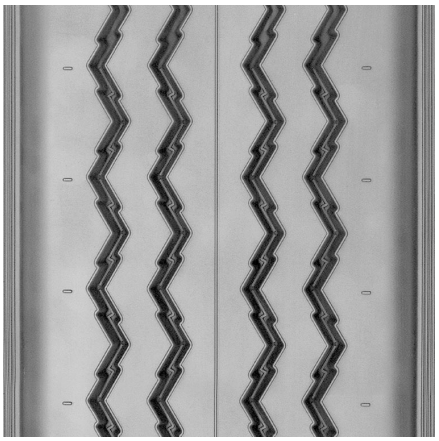

RUGGED SERVICE RIB

The Oliver® Rugged Service Rib is a rugged, all position retread designed for use in spread axle and multi-axle trailer applications.

POSITION

All-Position

APPLICATION

Regional / Line Haul / On/Off Road

BENEFITS AND FEATURES

- 18/32nds tread depth provides optimum wear in high-scuff service.
- Rounded shoulders and abbreviated wings provide shoulder adhesion and resist tread edge tearing.

SPECIFICATIONS

Radial Only

SIZE		BASE WIDTH		TREAD DEPTH	
mm	std.	mm	in.	mm	in.
205	8	205	8.07	14 mm	18/32
210	8.5N	210	8.27	14 mm	18/32
220	9	220	8.66	14 mm	18/32
230	9.5	230	9.06	14 mm	18/32

Abbreviated Wing. Note: Abbreviated Wings add 1" to overall base width.
Net Footprint: 80%

FITMENTS

Axle position indicated by "▲"

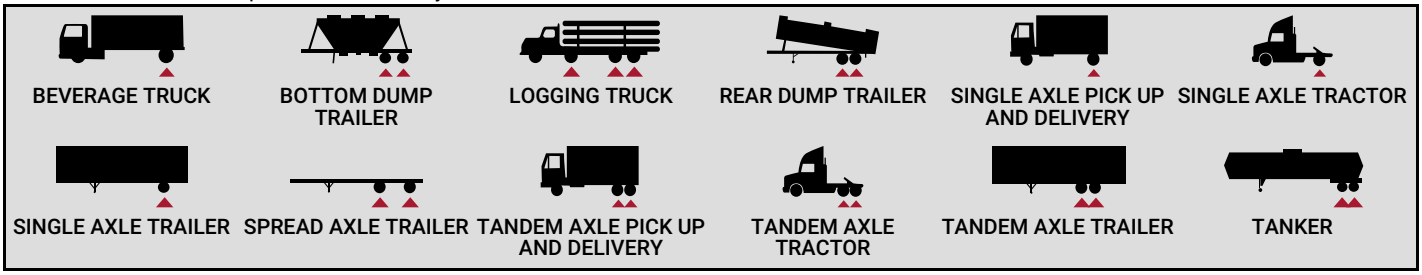

To learn more please contact your OLIVER® Sales Representative or **visit oliverrubber.com**
Oliver Rubber Company, One Parkway South, Greenville, SC 29602-9001, 1-866-464-2580
Copyright© 2024 Oliver Rubber Company. All Rights reserved.